







TECHNICAL DOCUMENTATION MULTIPOINT CONNECTIONS 10 CONNECTIONS

INORéA Automation & Industry
9 rue du Lugan
33130 BEGLES
contact@inorea.com
www.inorea.com



DESCRIPTION ET FEATURES:

Number of connections = 10 connections + ground

Terminal block to be screwed

Nominal tension: 400/500 V

Nominal intensity: 16 A

Protection: IP 65

Cable glanding supplied: PG16 (Ø20)

 Male and female connections are interchangeable between the plug and the socket

Possibility to connect the plug on a wire

Plug and socket made in metal

(For the plug to be connected on the electrical box, seals are supplied but not the screws)

Plug: to be fixed on the electrical box

CMB_10_PF_D(F)_010

Number of connections

P: plug on electrical box

F: socket on extension cable

T: (socket + extension cable)

F: female

M: male

T: everything (male + female)

CMB_10_PF_D(F)_010

D: right

R: extension cable

CF: closed

Socket: to be fixed on

a wire



References	Description	Photos	
	Complete batches : WITHOUT LID		
CMB_10_TT_D_010	Batch including: - 1 plug with base to fix on the electrical box - 1 connection: right socket - connection male/female interchangeable		
CMB_10_TT_L_010	Batch including: - 1 plug with base to fix on the electrical box - 1 connection: curved socket - connection male/female interchangeable		
Combinations			
CMB_10_FM_D_010	Socket connection: right + male		
CMB_10_FM_L_010	Socket connection: curved + male		
CMB_10_FF_D_010	Socket connection: right + female		
CMB_10_FF_L_010	Socket connection: curved + female		
CMB_10_PM_D_010	Plug with base to be fixed on the electrical box + male		
CMB_10_PF_D_010	Plug with base to be fixed on the electrical box + female		




References	Description	Photos	
Complete batches : WITH LID			
CMB_10_TT_DF_010	Batch including: -1 plug with hood to be fixed on the wall -1 plug: right with hood -Connection male/female interchangeable		
Combinations			
CMB_10_FM_DF_010	Socket with hood + male		
CMB_10_FF_DF_010	Socket with hood + female		
CMB_10_PM_DF_010	Plug with hood + male		
CMB_10_PF_DF_010	Plug with hood + female		




WITHOUT LID


Curved socket: CMB_10_Fx_L_010

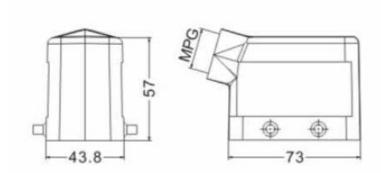




Curved socket: CMB_10_Fx_D_010








Plug with base to be fixed on the electrical box: $CMB_10_Px_D_010$











Right socket for hood: CMB_10_Fx_DF_010

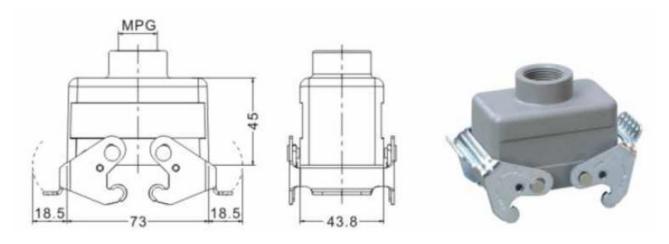

Plug with hood, to be fixed: CMB $_10_Px_DF_010$

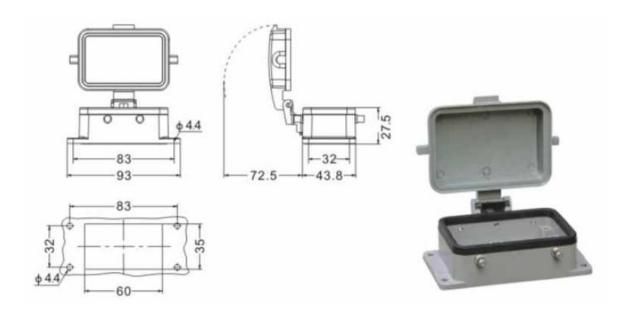



iNORéA Automation & Control Solution Provider www.inorea.com